



EXISTING TREE INVENTORY			
QUANTITY	TREE TYPE	CALIPER	TOTAL CALIPER
2	CEDAR ELM	9	18
1	CEDAR ELM	12	12
1	LIVE OAK	15	15
1	LIVE OAK	14	14
1	RED OAK	22	22
1	RED OAK	24	24
2	RED OAK	12	24
TOTAL EXISTING TREES REMOVED (100%)			9
TOTAL EXISTING TREE CALIPER INCHES TO BE REPLACED (100%)			129
NOTE: ALL TREES ARE TO BE REMOVED FROM THE SITE, FOR A 0% PRESERVATION RATE			
TOTAL TREE CALIPER INCHES REPLACED			129

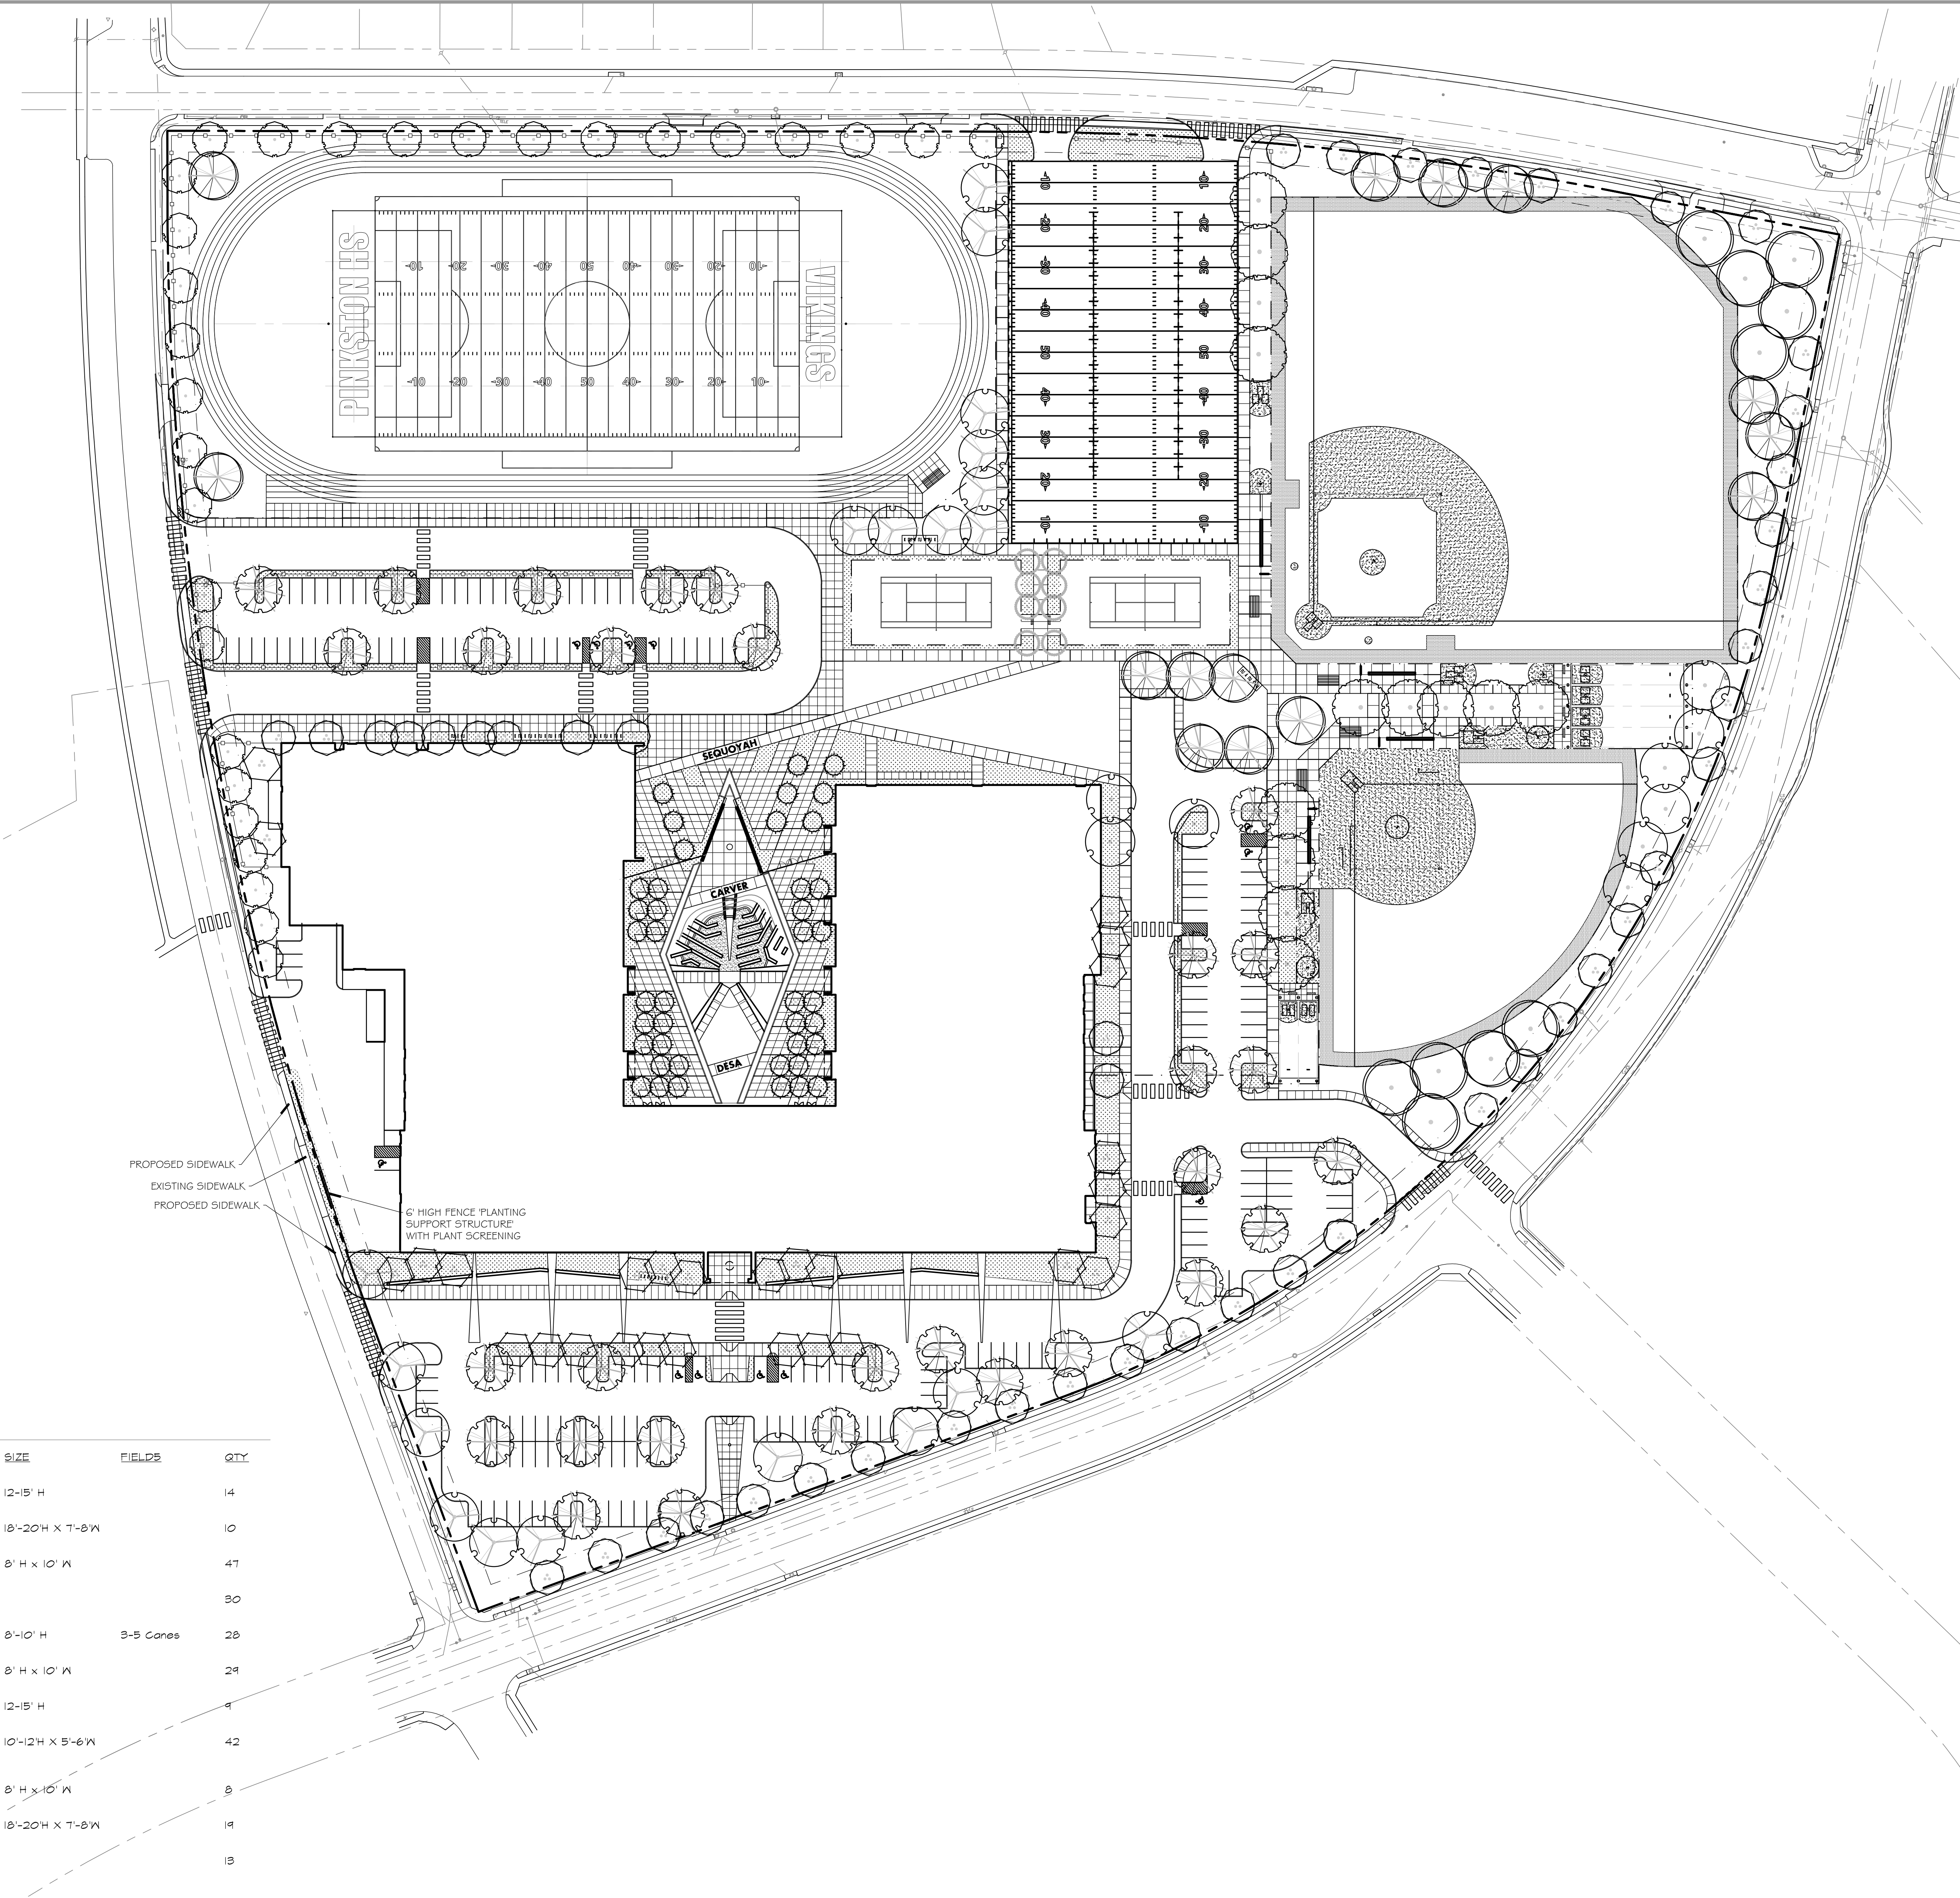

PLANT SCHEDULE

TREES	COMMON NAME / BOTANICAL NAME	CONT.	CAL.	SIZE	FIELDS	QTY
	Bald Cypress / <i>Taxodium distichum</i> Full Uniform Canopy	15 gal	5" Cal	12-15' H		14
	Bigtooth Maple / <i>Acer grandidentatum</i>	100 gal	4.5" Cal	18'-20' H x 7'-8' W		10
	Bubba Desert Willow / <i>Chilopsis linearis</i> 'Bubba' Full Uniform Canopy	45 gal	3" Cal	8' H x 10' W		47
	Cedar Elm / <i>Ulmus crassifolia</i> Full Uniform Canopy	100 gal	4" Cal			30
	Eastern Redbud / <i>Cercis canadensis</i> Full Uniform Canopy	65 gal	1.5 Cane Cal	8'-10' H	3-5 Canes	28
	Eve's Necklace / <i>Styphnolobium affine</i> Full Uniform Canopy	30 gal	2" Cal	8' H x 10' W		29
	Kentucky Coffee Tree / <i>Gymnocladus dioica</i>	15 gal	4" Cal	12-15' H		9
	Littleleaf Leadtree / <i>Leucaena retusa</i> Full Canopy, Straight Single Leader, 6' Clear Trunk Height	65 gal	3" Cal	10'-12' H x 5'-6' W		42
	Mexican Plum / <i>Prunus mexicana</i> Full Uniform Canopy	45 gal	3" Cal	8' H x 10' W		8
	Southern Live Oak / <i>Quercus virginiana</i> Full Uniform Canopy	100 gal	5" Cal	18'-20' H x 7'-8' W		19
	Southern Magnolia / <i>Magnolia grandiflora</i>	15 gal				13

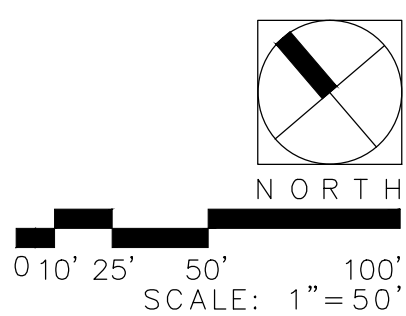




muñoz
1017 NORTH MAIN, SUITE 300
SAN ANTONIO, TEXAS 78212
0.210.349.1163 • F. 210.525.1038

DALLAS INDEPENDENT SCHOOL DISTRICT

L.G. PINKSTON HIGH SCHOOL
DALLAS, TEXAS

95% CONSTRUCTION DOCUMENTS PROGRESS

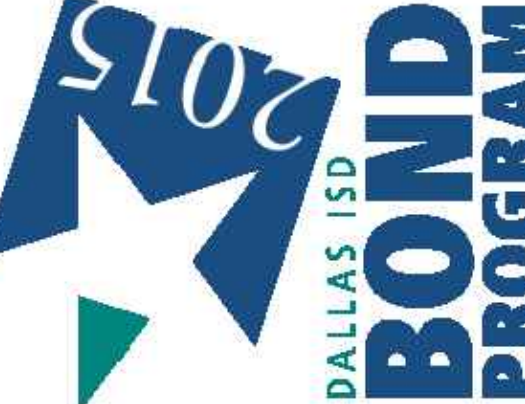

Revisions

#	DESCRIPTION	DATE
---	-------------	------

Date: **AUGUST 28, 2018**

Project Number	Checked By	Drawn By
A17005.00	AD	-

Sheet Title: **OVERALL LANDSCAPE PLANTING PLAN**

Sheet Number: **LP-300**