



**Application Instructions:**

**Soy-It Paint & Adhesive Stripper** is a professional blend of solvents designed to be used undiluted for most applications. Test all sprayers and items to be treated for solvent compatibility. Avoid contact with plastics.

Removing Sealers, Paints & Many Floor Coatings: Spray or brush on Soy-It and allow product to dwell for 10 to 60 minutes depending on the coating being removed. Brush or scrape as needed, rinse or wipe away.

Removing Mastic & Adhesives: Apply Soy-It undiluted to surface with sprayer. Allow solvent to dwell for 10 to 60 minutes. Wipe clean. Solvent will remain active on old, hard to remove mastics for up to 24 hours.

Stripping Old Varnish & Other Finishes: Apply Soy-It undiluted with sprayer or brush. Dwell time will depend on coating to be removed but will be in the 20 minutes to 1 hour range. Brush or scrape as needed, rinse or wipe away. For polyurethane removal use Soy-It Polyurethane Stripper.



**Application:**

Apply a thick layer of 600GL by pouring, brushing, squeegee, or commercial airless sprayer. Applying too thin will cause 600GL to dry out before removal is complete. Use a scraper to check if the coating is softened down to the surface. If not, wait longer and recheck. When the coating is completely softened, remove with a scraper.

**Clean Up:**

Use BLUE BEAR 700DG Degreaser or water and a scrub brush, mop, or power washer to clean remaining thin residue. Remove excess coating(s) and 600GL before using a power washer for final cleaning. Allow surface to dry before further preparations.

## Usage Tips From The Pros:

- For large application areas, use a professional airless sprayer or a 4-stage HVLP sprayer.
- For tough coating or numerous layers, use a notched 1/2" squeegee or 1/4" gauge rake. Square footage will be greatly reduced.
- When used outdoors, cover with a 2mil or thicker plastic to help keep 600GL wet and working.

## Coverage:


Coverage per square foot varies depending on the type and age of coatings, number of layers, and method of application.

- Horizontal: Average coverage is 125 sq. ft. per gallon (max 200 sq. ft. per gallon)
- Vertical: Average coverage is 75 sq. ft. per gallon



**Graffiti Remover by Natural Soy Products.**

**Effective, water soluble non-toxic paint remover. Remove graffiti** such as [spray paint](#), black paint, enamel paints, permanent marker, inks etc. without damaging the environment or humans. Same formula as SoyClean. Rinse away paint remover with water. 100% natural, soy-based, non-toxic product. Most other graffiti removers

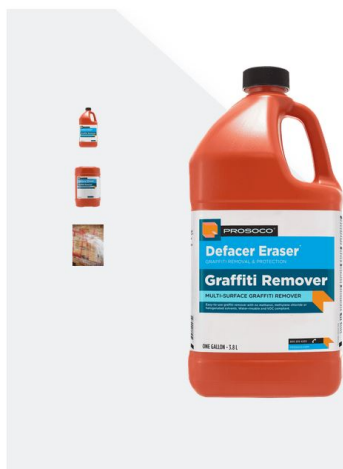

## Graffiti Remover

multi-surface paint remover

Graffiti Remover removes a variety of graffiti media, including spray paints and magic marker, from most smooth masonry, split-faced concrete block, wood and metal surfaces. Easy-to-use and compliant with all national, state and district AIM VOC regulations, Graffiti Remover contains no methanol, methylene chloride or other halogenated solvents prohibited on many projects.

Available at distributors nationwide. Call **888-216-3028**.

**BEFORE PAINT REMOVAL**





**AFTER PROSOCO SURE KLEAN HEAVY DUTY  
PAINT REMOVER**