
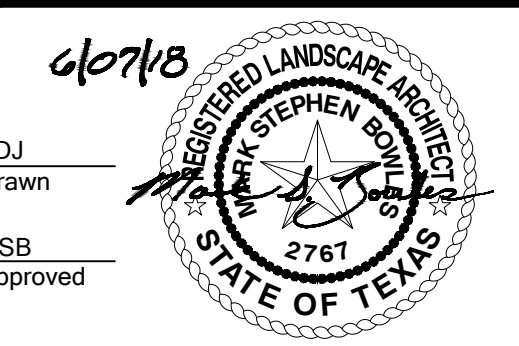


PLANTING LEGEND

	LIVE OAK
	CREPE MYRTLE 'TUSCARORA'
	COTONEASTER
	EXISTING SHRUBS
	LIRIOPE MUSCARI 'BIG BLUE'
	EXISTING GROUNDCOVER
	EXISTING COBBLESTONE
	PROPERTY LINE
	EASEMENT LINE
	LIMITS OF WORK LINE

IRRIGATION NOTES

- ALL LAWN SURFACES TO BE FULLY IRRIGATED WITH 100% HEAD TO HEAD COVERAGE. NO ROTOR SPRAY HEADS ARE TO BE USED
- ALL TREES TO BE IRRIGATED WITH MIN. (2) BUBBLERS.
- ALL PLANTER BEDS TO BE IRRIGATED VIA DRIP IRRIGATION.
- SLEEVES TO BE PROVIDED AS NEEDED TO CONNECT IRRIGATION LINES TO ANY PLANTED MEDIANS OR OTHER LANDSCAPE AREAS SEPARATED BY PAVEMENT PRIOR TO PAVEMENT INSTALLATION.
- NO IRRIGATION SPRAY IS TO BE DIRECTED ONTO WALKWAYS OR OTHER PAVEMENT.
- ALL IRRIGATION LINES SHALL BE LEAK-TESTED PRIOR TO BURIAL.
- SPRINKLER HEADS TO BE INSTALLED ONLY AFTER SYSTEM HAS BEEN COMPLETELY FLUSHED.
- ALL IRRIGATION AND RELATED EQUIPMENT INCLUDING (BUT NOT LIMITED TO) PIPING, VALVES, CONTROLLERS, BACKFLOW PREVENTERS, THRUST BLOCKS, CONTROL WIRE, VALVE BOXES, SPRINKLER HEADS, RISERS, ETC. TO BE INSTALLED ACCORDING TO MANUFACTURER'S SPECIFICATIONS.
- AS-BUILT DRAWINGS FOR ALL IRRIGATION PLUMBING AND EQUIPMENT SHALL BE ACCURATELY MAINTAINED DURING INSTALLATION AND PROVIDED TO OWNER AT TIME OF FINAL ACCEPTANCE.
- IRRIGATION MUST FOLLOW ALL TCEQ 30 TAC 344 REGULATIONS.



07.20.2018 City Comments
06.08.2018 Drawing Set - Revision 1